


## Table of contents

Table of contents .....	1
Summary.....	2
E4.4.1 - Thickness of cylindrical shells and tubes under external pressure - ASME BPVC VIII-1 UG-28 & Appendix 1: 2017 .....	3
E4.4.2 with B taken by ASME - Formed heads pressure under external pressure - ASME BPVC VIII-1 UG-33 & Appendix-1: 2017 .....	4
E4.4.2 with B taken by LV - Formed heads pressure under external pressure - ASME BPVC VIII-1 UG-33 & Appendix-1: 2017 .....	8
E4.4.3 with B taken by LV - Thickness of spherical shells under external pressure - ASME BPVC VIII-1 UG-28 & Appendix 1: 2017 .....	12
E4.4.3 with B taken by ASME - Thickness of spherical shells under external pressure - ASME BPVC VIII-1 UG-28 & Appendix 1: 2017 .....	14
E4.4.4 with B taken by LV - Formed heads pressure under external pressure - ASME BPVC VIII-1 UG-33 & Appendix-1: 2017 .....	16
E4.4.5 - Formed heads pressure under external pressure - ASME BPVC VIII-1 UG-33 & Appendix-1: 2017 .....	18
Appendix: Material documentation .....	20

## Layout


Input values:	1.234	or	1.234
Calculated values:	1.234	or	1.234
Critical values:	1.234	or	1.234
Estimated values:	1.234	or	1.234



## Summary

Strength Calculation Software	Program System ATLAS	Version <b>8.29.1</b>
Developed by Lauterbach Verfahrenstechnik GmbH	Certificate Number	
Certified per DIN EN ISO 9001:2015	01 100 044763	

	LV Soft		ASME	Diff [%]
Example E4.3.1 - Cylinder Shell				
Required thickness $t_c$ [in]	20,62 mm	0,81 in	0,81 in	<b>0,00%</b>
Required thickness $t_{long}$ [in]	10,16 mm	0,40 in	0,40 in	<b>0,00%</b>
Example E4.3.2 - Conical Shell				
Required thickness $t$ [in]	39,92 mm	1,57 in	1,57 in	<b>0,11%</b>
Example E4.3.3 - spherical Shell				
Required thickness $t$ [in]	94,65 mm	3,73 in	3,73 in	<b>0,00%</b>
Example E4.3.4 - Torispherical Head				
Allowable Pressure $P$ [psi]	9,34 bar	135,42 Psi	135,30 in	<b>0,09%</b>
Example E4.3.5 - Elliptical Head				
Allowable Pressure $P$ [psi]	30,51 bar	442,57 Psi	442,23 in	<b>0,08%</b>




## E4.4.1 - Thickness of cylindrical shells and tubes under external pressure - ASME BPVC VIII-1 UG-28 & Appendix 1: 2017

### Cylindrical shells under external pressure


External design pressure  
Hydrostatic head  
External calculation pressure  
Calculation temperature

$p_D$  14.5 psi  
 $D_p$  0 psi  
 $p_0$  14.5 psi  
 $T_0$  300 °F

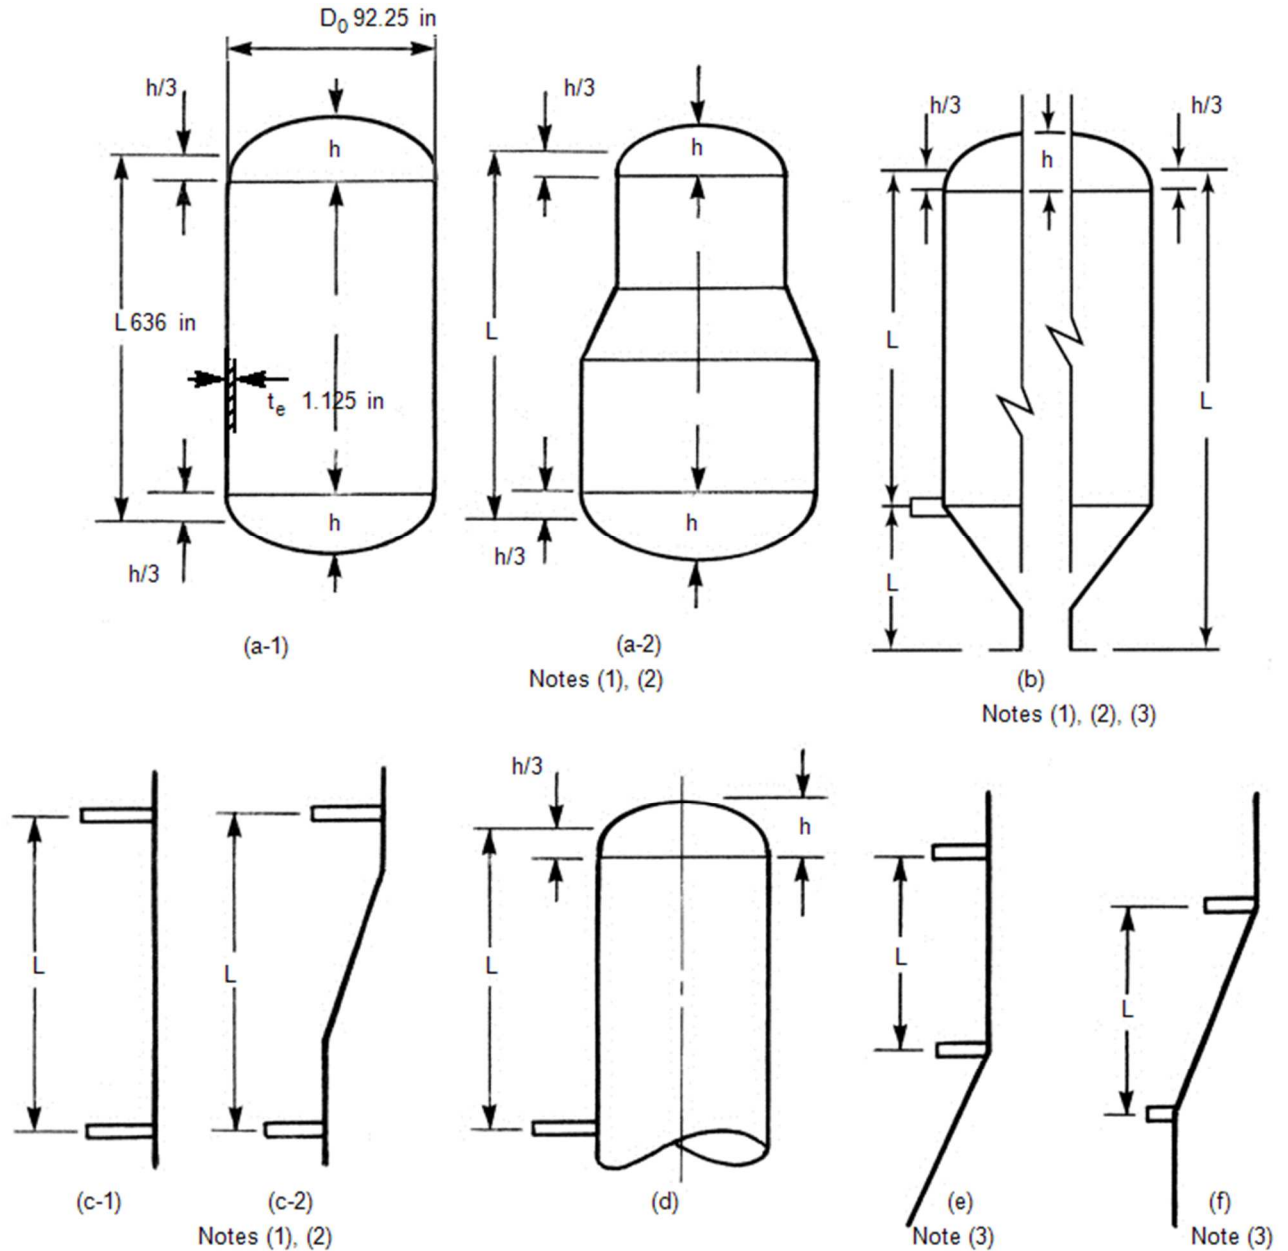

Outside diameter  
Design wall thickness  
Wall thickness allowance  
Allowance (corrosion)  
Buckling length

$D_0$  92.25 in  
 $t_e$  1.125 in  
 $c_1$  0 in  
 $c_2$  0.125 in  
 $L$  636 in



# ASME BPVC VIII-1 2017 E4.3.1-2-3-4-5 -PTB-4-2013

Material K02700-SA-516-70-Class:-Size:

Spec. Min. Yield	$S_y$	33600	psi
Allowable stress	$S_0$	20015	psi
Applicable material chart	Fig	CS-2	
Modulus of elasticity	E	2.829e+7	psi

## Results

Effective thickness	$t_0$	1	in
Ratio	$L/D_0$	6.894	
Ratio	$D_0/t_0$	92.25	
Factor according to ASME-IID\Table G	A	1.884e-4	
Factor (see material chart)	B	2700	psi
Factor $2 \cdot \min(S_0; 9 \cdot B)$	S	4860	psi
Required thickness acc. UG-28	$t_{UG-28}$	0.6718	in
Required thickness acc. UG-16	$t_{UG-16}$	0.05906	in
Required thickness	t	0.6718	in
Required thickness incl. allowances	$t+c_1+c_2$	0.7968	in
Allowable excess pressure	P	38.51	psi
Allowable pressure without hydrostatic head	MAWP	38.51	psi


Remark

## Equations

$$\frac{D_0}{t_0} \geq 10 \Leftrightarrow 92.25 \geq 10 \quad \text{UG-28 c) (1)}$$

$$Pa(B) = \frac{4 \cdot B}{3 \cdot \frac{D_0}{t_0}} = \frac{4 \cdot 18.62 \text{ N/mm}^2}{3 \cdot 92.25} = 0.2691 \text{ MPa} \quad \text{Step 6}$$

$$Pa(E) = \frac{2 \cdot A \cdot E}{3 \cdot \frac{D_0}{t_0}} = \frac{2 \cdot 1.884e-4 \cdot 195054 \text{ N/mm}^2}{3 \cdot 92.25} = 0.2656 \text{ MPa} \quad \text{Step 7}$$



**E4.4.2 with B taken by ASME - Formed heads pressure under external pressure - ASME BPVC VIII-1 UG-33 & Appendix-1: 2017**


**Conical shells under external pressure acc. UG-33(f)**

External design pressure  
Hydrostatic head  
Calculation pressure  
Calculation temperature

$p_D$	249 psi
$D_p$	0 psi
$p_0$	<b>249</b> psi
$T_0$	300 °F

Material K02700-SA-516-70-Class:-Size:  
Spec. Min. Yield  
Allowable stress  
Applicable material chart  
Modulus of elasticity

$S_y$	<b>33600</b> psi
$S_0$	20015 psi
Fig	CS-2
E	$2.9e+7$ psi

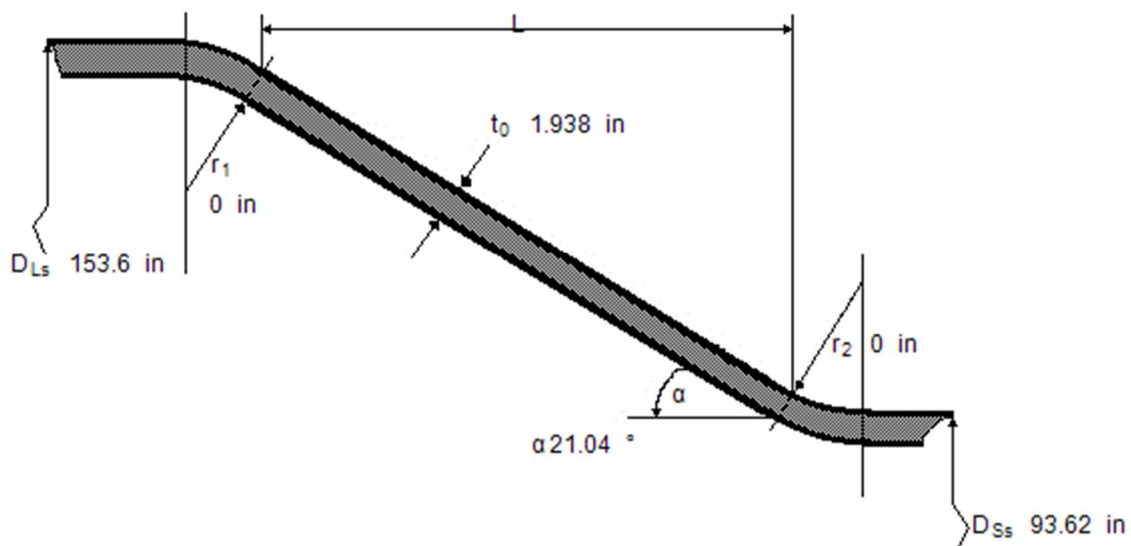

Cone wall thickness with allowances  
Wall thickness allowance  
Allowance (corrosion)  
Cone wall thickness without allowances

$t_0$	1.938 in
$c_1$	0 in
$c_2$	0.125 in
$t$	<b>1.813</b> in


Is a cylinder connected, which does not act as line of support?

N (Y/N)

Outside diameter ( wide end )  
Knuckle radius ( wide end )  
Outside diameter ( small end )  
Knuckle radius ( small end )  
Half apex angle ( $\leq 60^\circ$ )

$D_{Ls}$	153.6 in
$r_1$	0 in
$D_{Ss}$	93.62 in
$r_2$	0 in
$\alpha$	21.04 °

**Proof for cross-section area according to App. 1-8 required for cone-connection without knuckle**



### Results

Effective thickness	$t_e = t \cdot \cos(\alpha)$	$t_e$	<b>1.692</b> in
Axial length of the cone		$L$	<b>78</b> in
Design length		$L_e$	<b>62.77</b> in
Ratio		$L_e/D_L$	<b>0.4086</b>
Ratio		$D_L/t_e$	<b>90.81</b>
Factor according to fig. 5-UGO-28.0		A	<b>0.004132</b>
Factor (see material chart)		B	17000 psi
Factor	$2 \cdot \text{Min}(S_0; 9 \cdot B)$	S	<b>31589</b> psi
Allowable external pressure (for $t_0$ )		P	<b>249.6</b> psi
Allowable pressure without hydrostatic head		MEP	<b>249.6</b> psi
Required thickness (for $P_0$ )		t	<b>1.819</b> in
Required thickness incl. allowances		$t+c_1+c_2$	<b>1.944</b> in

Remark **Thickness not sufficient**

### Equations

$$\cos(\alpha) = \cos(\alpha) = \cos(21.04^\circ) = 0.9333$$

$$\sin(\alpha) = \sin(\alpha) = \sin(21.04^\circ) = 0.359$$

$$\tan(\alpha) = \tan(\alpha) = \tan(21.04^\circ) = 0.3846$$

$$D_L = D_{Ls} - r_1 \cdot (1 - \cos(\alpha)) = 3902 \text{ mm} - 0 \text{ mm} \cdot (1 - 0.9333) = 3902 \text{ mm}$$

$$D_S = D_{Ss} + r_2 \cdot (1 - \cos(\alpha)) = 2378 \text{ mm} + 0 \text{ mm} \cdot (1 - 0.9333) = 2378 \text{ mm}$$

$$L = \frac{(D_L - D_S)}{2} \cdot \tan(\alpha) = \frac{(3902 \text{ mm} - 2378 \text{ mm})}{2} \cdot 0.3846 = 1981 \text{ mm}$$

$$L_1 = r_1 \cdot \sin(\alpha) = 0 \text{ mm} \cdot 0.359 = 0 \text{ mm}$$

$$L_2 = r_2 \cdot \left( \frac{D_{Ss}}{D_{Ls}} \right) \cdot \sin(\alpha) = 0 \text{ mm} \cdot 0.6094 \cdot 0.359 = 0 \text{ mm}$$

$$L_3 = \frac{L}{2} \cdot \frac{(D_L + D_S)}{D_{Ls}} = \frac{1981 \text{ mm}}{2} \cdot \frac{(3902 \text{ mm} + 2378 \text{ mm})}{3902 \text{ mm}} = 1594 \text{ mm}$$

$$L_e = L_1 + L_2 + L_3 = 0 \text{ mm} + 0 \text{ mm} + 1594 \text{ mm} = 1594 \text{ mm}$$

1) for  $D_L/t_0 \geq 10$


$$Pa(B) = \frac{4 \cdot B}{3 \cdot \left( \frac{D_L}{t_0} \right)} = \frac{4 \cdot 117.2 \text{ N/mm}^2}{3 \cdot 90.81} = 1.721 \text{ N/mm}^2$$

UG-33 f-a) Step 6

$$Pa(E) = \frac{2 \cdot A \cdot E}{3 \cdot \left( \frac{D_L}{t_0} \right)} = \frac{2 \cdot 0.004132 \cdot 199948 \text{ N/mm}^2}{3 \cdot 90.81} = 6.066 \text{ N/mm}^2$$

UG-33 f-a) Step 7

2) for  $D_L/t_0 < 10$




UG-33 f-b) Step 2

$$P_{a1} = \left[ \frac{2.167}{\frac{D_L}{t_0}} - 0.0833 \right] \cdot B = \left[ \frac{2.167}{90.81} - 0.0833 \right] \cdot 117.2 \text{ N/mm}^2 = -6.967 \text{ N/mm}^2$$

UG-33 f-b) Step 3

$$P_{a2} = \frac{2 \cdot S}{\frac{D_L}{t_0}} \cdot \left[ 1 - \frac{2 \cdot S}{\frac{D_L}{t_0}} \right] = \frac{2 \cdot 217.8 \text{ N/mm}^2}{90.81} \cdot \left[ 1 - \frac{2 \cdot 217.8 \text{ N/mm}^2}{90.81} \right] = 4.744 \text{ N/mm}^2$$



**E4.4.2 with B taken by LV - Formed heads pressure under external pressure - ASME BPVC VIII-1 UG-33 & Appendix-1: 2017**


**Conical shells under external pressure acc. UG-33(f)**

External design pressure  
Hydrostatic head  
Calculation pressure  
Calculation temperature

$p_D$  249 psi  
 $D_p$  0 psi  
 $p_0$  **249** psi  
 $T_0$  300 °F

Material K02700-SA-516-70-Class:-Size:  
Spec. Min. Yield  
Allowable stress  
Applicable material chart  
Modulus of elasticity

$S_y$  **33600** psi  
 $S_0$  20015 psi  
Fig CS-2  
 $E$  2.9e+7 psi

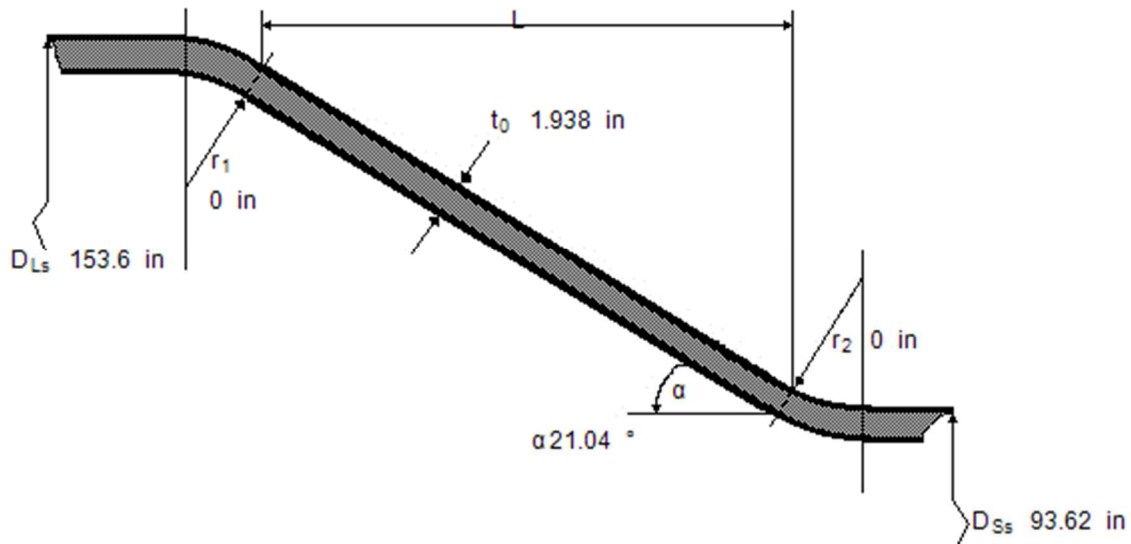

Cone wall thickness with allowances  
Wall thickness allowance  
Allowance (corrosion)  
Cone wall thickness without allowances

$t_0$  1.938 in  
 $c_1$  0 in  
 $c_2$  0.125 in  
 $t$  **1.813** in

Is a cylinder connected, which does not act as line of support?


N (Y/N)

Outside diameter ( wide end )  
Knuckle radius ( wide end )  
Outside diameter ( small end )  
Knuckle radius ( small end )  
Half apex angle ( $\leq 60^\circ$ )

$D_{Ls}$  153.6 in  
 $r_1$  0 in  
 $D_{Ss}$  93.62 in  
 $r_2$  0 in  
 $\alpha$  21.04 °

**Proof for cross-section area according to App. 1-8 required for cone-connection without knuckle**





### Results

Effective thickness	$t_e = t \cdot \cos(\alpha)$	$t_e$	<b>1.692</b> in
Axial length of the cone		$L$	<b>78</b> in
Design length		$L_e$	<b>62.77</b> in
Ratio		$L_e/D_L$	<b>0.4086</b>
Ratio		$D_L/t_e$	<b>90.81</b>
Factor according to fig. 5-UGO-28.0		A	<b>0.004132</b>
Factor (see material chart)		B	<b>16887</b> psi
Factor	$2 \cdot \min(S_0, 9 \cdot B)$	S	<b>31589</b> psi
Allowable external pressure (for $t_0$ )		P	<b>247.9</b> psi
Allowable pressure without hydrostatic head		MEP	<b>247.9</b> psi
Required thickness (for $P_0$ )		t	<b>1.819</b> in
Required thickness incl. allowances		$t+c_1+c_2$	<b>1.944</b> in

Remark **Pressure not allowable**

### Equations

$$\cos(\alpha) = \cos(\alpha) = \cos(21.04^\circ) = 0.9333$$

$$\sin(\alpha) = \sin(\alpha) = \sin(21.04^\circ) = 0.359$$

$$\tan(\alpha) = \tan(\alpha) = \tan(21.04^\circ) = 0.3846$$

$$D_L = D_{Ls} - r_1 \cdot (1 - \cos(\alpha)) = 3902 \text{ mm} - 0 \text{ mm} \cdot (1 - 0.9333) = 3902 \text{ mm}$$

$$D_S = D_{Ss} + r_2 \cdot (1 - \cos(\alpha)) = 2378 \text{ mm} + 0 \text{ mm} \cdot (1 - 0.9333) = 2378 \text{ mm}$$

$$L = \frac{(D_L - D_S)}{2} \cdot \tan(\alpha) = \frac{(3902 \text{ mm} - 2378 \text{ mm})}{2} \cdot 0.3846 = 1981 \text{ mm}$$

$$L_1 = r_1 \cdot \sin(\alpha) = 0 \text{ mm} \cdot 0.359 = 0 \text{ mm}$$

$$L_2 = r_2 \cdot \left( \frac{D_{Ss}}{D_{Ls}} \right) \cdot \sin(\alpha) = 0 \text{ mm} \cdot 0.6094 \cdot 0.359 = 0 \text{ mm}$$

$$L_3 = \frac{L}{2} \cdot \frac{(D_L + D_S)}{D_{Ls}} = \frac{1981 \text{ mm}}{2} \cdot \frac{(3902 \text{ mm} + 2378 \text{ mm})}{3902 \text{ mm}} = 1594 \text{ mm}$$

$$L_e = L_1 + L_2 + L_3 = 0 \text{ mm} + 0 \text{ mm} + 1594 \text{ mm} = 1594 \text{ mm}$$

1) for  $D_L/t_0 \geq 10$


$$Pa(B) = \frac{4 \cdot B}{3 \cdot \left( \frac{D_L}{t_0} \right)} = \frac{4 \cdot 116.4 \text{ N/mm}^2}{3 \cdot 90.81} = 1.71 \text{ N/mm}^2$$

UG-33 f-a) Step 6

$$Pa(E) = \frac{2 \cdot A \cdot E}{3 \cdot \left( \frac{D_L}{t_0} \right)} = \frac{2 \cdot 0.004132 \cdot 199948 \text{ N/mm}^2}{3 \cdot 90.81} = 6.066 \text{ N/mm}^2$$

UG-33 f-a) Step 7

2) for  $D_L/t_0 < 10$




UG-33 f-b) Step 2

$$P_{a1} = \left[ \frac{2.167}{\frac{D_L}{t_0}} - 0.0833 \right] \cdot B = \left[ \frac{2.167}{90.81} - 0.0833 \right] \cdot 116.4 \text{ N/mm}^2 = -6.92 \text{ N/mm}^2$$

UG-33 f-b) Step 3

$$P_{a2} = \frac{2 \cdot S}{\frac{D_L}{t_0}} \cdot \left[ 1 - \frac{2 \cdot S}{\frac{D_L}{t_0}} \right] = \frac{2 \cdot 217.8 \text{ N/mm}^2}{90.81} \cdot \left[ 1 - \frac{2 \cdot 217.8 \text{ N/mm}^2}{90.81} \right] = 4.744 \text{ N/mm}^2$$




### E4.4.3 with B taken by LV - Thickness of spherical shells under external pressure - ASME BPVC VIII-1 UG-28 & Appendix 1: 2017

#### Spherical shells under external pressure

External design pressure  
Hydrostatic head  
External calculation pressure  
Calculation temperature

$p_D$  572 psi  
 $D_p$  0 psi  
 $p_0$  **572** psi  
 $T_0$  350 °F

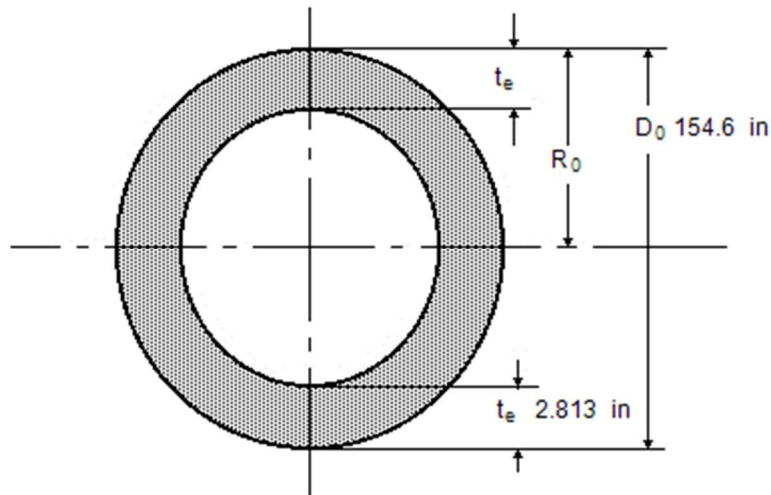

Outside diameter  
Design wall thickness  
Wall thickness allowance  
Allowance (corrosion)

$D_0$  154.6 in  
 $t_e$  2.813 in  
 $c_1$  0 in  
 $c_2$  0 in

Material K31835-SA-542-D-Class:4a-Size:

Spec. Min. Yield  
Allowable stress  
Applicable material chart  
Modulus of elasticity

$S_y$  60190 psi  
 $S_0$  24366 psi  
Fig CS-2  
 $E$  2.852e+7 psi

#### Results

Effective thickness  
Tip radius  
Ratio

$t_0$  **2.813** in  
 $R_0$  **77.3** in  
 $R_0/t_0$  **27.48**


Factor  $0.125/(R_0/t_0)$   
Factor (see material chart)

A **0.004548**  
B **16009** psi

Required thickness acc. UG-28  
Required thickness acc. UG-16  
Required thickness  
Required thickness incl. allowances  
Allowable excess pressure  
Allowable pressure without hydrostatic head

$t_{UG-28}$  **2.767** in  
 $t_{UG-16}$  0.05906 in  
 $t$  **2.767** in  
 $t+c_1+c_2$  **2.767** in  
P **582.5** psi  
MAWP **582.5** psi

Remark




**Equations**

$$Pa(B) = \frac{B}{\left(\frac{R_0}{t_0}\right)} = \frac{110.4 \text{ N/mm}^2}{27.48} = 4.016 \text{ MPa}$$

UG-28 d) Step 4

$$Pa(E) = 0.0625 \cdot \frac{E}{\left(\frac{R_0}{t_0}\right)^2} = 0.0625 \cdot \frac{196606 \text{ N/mm}^2}{(27.48)^2} = 16.27 \text{ MPa}$$

UG-28 d) Step 5




**E4.4.3 with B taken by ASME - Thickness of spherical shells under external pressure - ASME BPVC VIII-1 UG-28 & Appendix 1: 2017**

**Spherical shells under external pressure**

External design pressure  
Hydrostatic head  
External calculation pressure  
Calculation temperature

$p_D$  571.1 psi  
 $D_p$  0 psi  
 $p_0$  **571.1** psi  
 $T_0$  350 °F

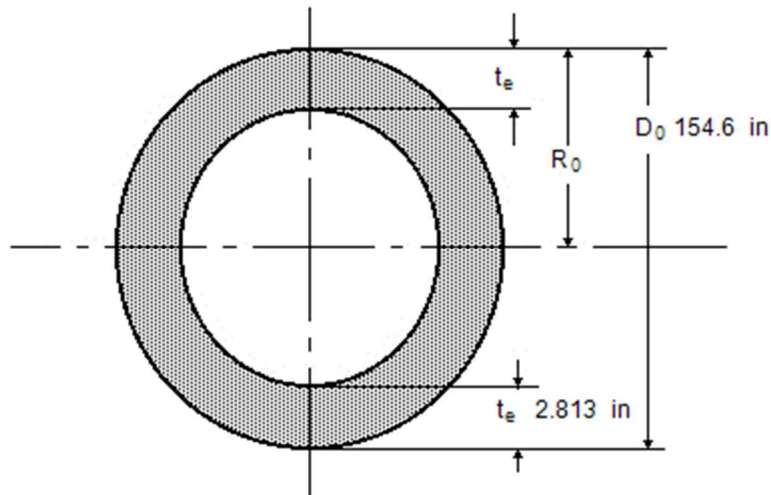

Outside diameter  
Design wall thickness  
Wall thickness allowance  
Allowance (corrosion)

$D_0$  154.6 in  
 $t_e$  2.813 in  
 $c_1$  0 in  
 $c_2$  0 in

Material K31835-SA-542-D-Class:4a-Size:

Spec. Min. Yield  
Allowable stress  
Applicable material chart  
Modulus of elasticity

$S_y$  60190 psi  
 $S_0$  24366 psi  
Fig CS-2  
 $E$  2.852e+7 psi

**Results**

Effective thickness  
Tip radius  
Ratio

$t_0$  **2.813** in  
 $R_0$  **77.3** in  
 $R_0/t_0$  **27.48**


Factor  $0.125/(R_0/t_0)$   
Factor (see material chart)

A **0.004548**  
B 15700 psi

Required thickness acc. UG-28  
Required thickness acc. UG-16  
Required thickness  
Required thickness incl. allowances  
Allowable excess pressure  
Allowable pressure without hydrostatic head

$t_{UG-28}$  **2.763** in  
 $t_{UG-16}$  0.05906 in  
 $t$  **2.763** in  
 $t+c_1+c_2$  **2.763** in  
P **571.2** psi  
MAWP **571.2** psi

Remark




**Equations**

$$Pa(B) = \frac{B}{\left(\frac{R_0}{t_0}\right)} = \frac{108.2 \text{ N/mm}^2}{27.48} = 3.939 \text{ MPa}$$

UG-28 d) Step 4

$$Pa(E) = 0.0625 \cdot \frac{E}{\left(\frac{R_0}{t_0}\right)^2} = 0.0625 \cdot \frac{196606 \text{ N/mm}^2}{(27.48)^2} = 16.27 \text{ MPa}$$

UG-28 d) Step 5



**E4.4.4 with B taken by LV - Formed heads pressure under external pressure - ASME BPVC VIII-1 UG-33 & Appendix-1: 2017**


**Torispherical heads**

External design pressure  
Hydrostatic head  
Calculation pressure  
Calculation temperature

$p_D$  55.6 psi  
 $D_p$  0 psi  
 $p_0$  **55.6** psi  
 $T_0$  650 °F

Design wall thickness  
Wall thickness allowance  
Allowance (corrosion)  
Effective thickness

$t_e$  0.625 in  
 $c_1$  0 in  
 $c_2$  0.125 in  
 $t_0$  **0.5** in

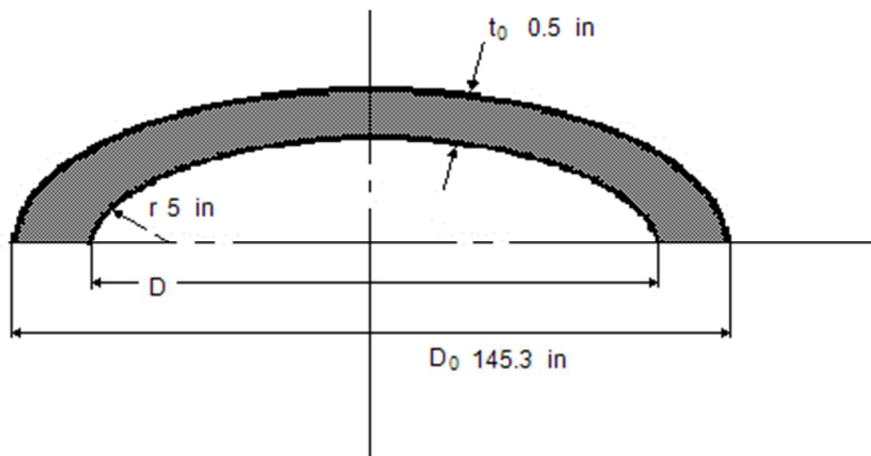

Outside diameter of the head skirt  
Type of head Torispherical head  
Outside calotte radius  
Knuckle radius

$D_0$  145.3 in  
 $R_0$  72.63 in  
 $r$  5 in

Material K11789-SA-387-11-Class:1-Size:

Spec. Min. Yield  
Allowable stress  
Applicable material chart  
Modulus of elasticity

$S_y$  34809 psi  
 $S_0$  17114 psi  
Fig CS-2  
 $E$  2.512e+7 psi

**Results**

Ratio

$R_0/t_0$  **145.3**


Factor (see material chart)

$B$  **8093** psi

Allowable external pressure  
Allowable pressure without hydrostatic head  
Required thickness  
Required thickness incl. allowances

$P$  **55.72** psi  
MEP **55.72** psi  
 $t$  0.499 in  
 $t+c_1+c_2$  0.624 in

Remark



**Equations**


$$Pa(B) = \frac{B}{\left(R_0 / t_0\right)} = \frac{55.8 \text{ N/mm}^2}{145.3} = 0.3842 \text{ N/mm}^2$$

UG-28 d) Step 4

$$Pa(E) = 0.0625 \cdot \frac{E}{\left(R_0 / t_0\right)^2} = 0.0625 \cdot \frac{173231 \text{ N/mm}^2}{(145.3)^2} = 0.5131 \text{ N/mm}^2$$

UG-28 d) Step 5






### E4.4.5 - Formed heads pressure under external pressure - ASME BPVC VIII-1 UG-33 & Appendix-1: 2017

#### Ellipsoidal heads under external pressure

External design pressure	$p_D$	166.1 psi
Hydrostatic head	$D_p$	0 psi
Calculation pressure	$p_0$	166.1 psi
Calculation temperature	$T_0$	300 °F
Final wall thickness	$t_e$	1.125 in
Wall thickness allowance	$c_1$	0 in
Allowance (corrosion)	$c_2$	0.125 in
Effective thickness	$t_0$	1 in

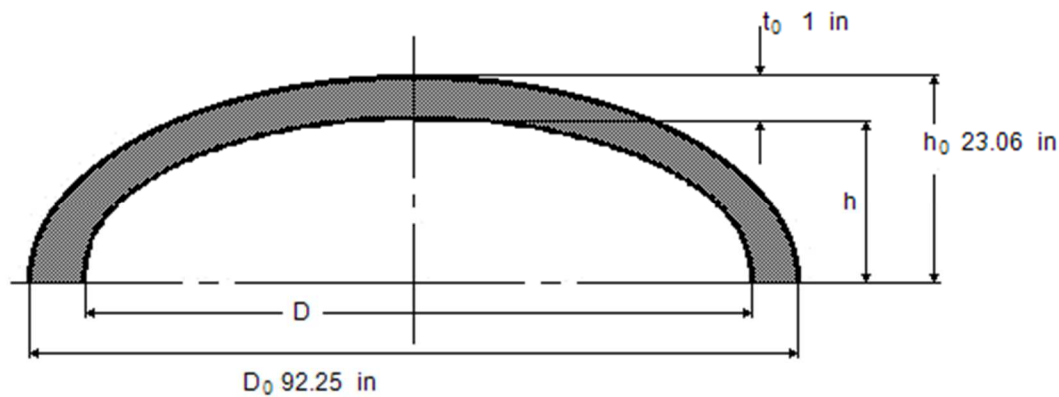

Outside diameter of the head skirt	$D_0$	92.25 in
Outer height of crown (short semiaxis)	$h_0$	23.06 in


Material K02700-SA-516-70-Class:-Size:

Spec. Min. Yield	$S_y$	37710 psi
Allowable stress	$S_0$	20015 psi
Applicable material chart	Fig	CS-2
Modulus of elasticity	$E$	2.9e+7 psi

#### Results

Ratio	$D_0/2h_0$	2
Factor (according to chart UG-33.1)	$K_0$	0.9
Design radius of crown	$R_0$	83.02 in
Ratio	$R_0/t_0$	83.02
Factor	$A$	0.001506
Factor (see material chart)	$B$	13795 psi
Allowable external pressure	$P$	166.2 psi
Allowable pressure without hydrostatic head	MEP	166.2 psi
Required thickness without allowance	$t$	0.9999 in
Required thickness incl. allowances	$t+c_1+c_2$	1.125 in

Remark




**Equations**

$$Pa(B) = \frac{B}{\left(R_0 / t_0\right)} = \frac{95.11 \text{ N/mm}^2}{83.02} = 1.146 \text{ N/mm}^2$$

UG-28 d) Step 4

$$Pa(E) = 0.0625 \cdot \frac{E}{\left(R_0 / t_0\right)^2} = 0.0625 \cdot \frac{199948 \text{ N/mm}^2}{(83.02)^2} = 1.813 \text{ N/mm}^2$$

UG-28 d) Step 5



## Appendix: Material documentation

Section 1: Schale/E4.4.1  
Section 2: Boden/E4.4.2 with B taken by ASME  
Section 3: Boden/E4.4.2 with B taken by LV  
Section 7: Boden/E4.4.5

### Material specification:

Regulation: ASMET1A:2017Spec. No.: SA-516 Product: Plate  
Material code: K02700-SA-516-70-Class:-Size: Short name: Carbon steel

### Design conditions and dimensions:

Temperature [°C]: 148,8889 Pressure [bar]: 1  
Thickness [mm]: 28,575 Outside diameter [mm]: 2343,15

### Material values for test and design conditions:

	Test condition	Operating condition
Nominal design strength [N/mm <sup>2</sup> ]:	138.00	138.00
Safety factor:		
Allowable stress [N/mm <sup>2</sup> ]:	138.00	138.00
Modulus of elasticity [kN/mm <sup>2</sup> ]:	202,35	195,0667

Wall thickness tolerance [mm]: 0.00 acc. to SA-516

#### Notes:

G10 General Requirements

Upon prolonged exposure to temperatures above 425°C, the carbide phase of carbon steel may be converted to graphite. See Nonmandatory Appendix A, A-201 and A-202.

#### S1 Size Requirements

For Section I applications, stress values at temperatures of 450°C and above are permissible but, except for tubular products 75 mm O.D. or less enclosed within the boiler setting, use of these materials at these temperatures is not current practice.

#### T2 Time-Dependent Properties

Allowable stresses for temperatures of 400°C and above are values obtained from time-dependent properties.

--

Creep rupture strength for 100000 h [MPa]:

### Tensile strength and yield stress at ambient temperature:

Diam./.....	Tensile str....	.....	ReH.....	Rupture.....	Rupture.....
Thick.....	Rm min.....	Rm max.....	.....	elong.....	elong.....
<= mm.....	MPa.....	MPa.....	MPa.....	lngt. %.....	lat. %.....
.....	.....	.....	.....	.....	.....

K-values as function of the temperature

Diam./...	.....	.....	.....	.....	.....	.....	.....	.....
Thickn... 50°C.....	100°C.....	150°C.....	200°C.....	250°C.....	300°C.....	350°C.....	400°C.....	.....
<= mm.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....
.....	.....	138.....	138.....	138.....	138.....	136.....	128.....	101.....


K-values as function of the temperature

Diam./.....	.....	.....	.....	.....	.....	.....	.....	.....
Thickn.... 450°C.....	500°C.....	550°C.....	600°C.....	650°C.....	700°C.....	800°C.....	.....	.....
<= mm.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....
.....	67.1.....	33.6.....	12.9.....	.....	.....	.....	.....	.....

### Modulus of elasticity in dependence of the temperature:

Static modulus of elasticity in [kN/mm<sup>2</sup>] at the temperature of

-75...|-200...|-125...|25...|100...|150...|200...|250...|300...|350...|400...|450...|500...|550...



# ASME BPVC VIII-1 2017 E4.3.1-2-3-4-5 -PTB-4-2013

209... | 216... | 212... | 202... | 198... | 195... | 192... | 189... | 185... | 179... | 171... | 162... | 151... | 137...

## Coefficient of linear expansion:

Thermal coefficient of expansion between 20°C and

Density (20 °C)	100°C..	200°C..	300°C..	400°C..	500°C..	600°C..	700°C..	800°C..	Heat...	Heat...
kg/dm³	10E-6/K	10E-6/K	10E-6/K	10E-6/K	10E-6/K	10E-6/K	10E-6/K	10E-6/K	cond...	capac...
	W/Km	J/kgK								
	7.85...	12,1...	12,7...	13,3...	13,8...	14,4...	14.8...	15.1...	15.4...	

Section 4: Schale/E4.4.3 with B taken by LV  
Section 5: Schale/E4.4.3 with B taken by ASME

## Material specification:

Regulation:	ASMET1A:2017Spec. No.:	SA-542	Product:	Plate
Material code:	K31835-SA-542-D-Class:4a-Size:		Short name:	2.25Cr-1Mo-V

## Design conditions and dimensions:

Temperature [°C]:	176,6667	Pressure [bar]:	39,43826
Thickness [mm]:	71,4375	Outside diameter [mm]:	3926,84

## Material values for test and design conditions:

	Test condition	Operating condition
Nominal design strength [N/mm²]:	168.00	168.00
Safety factor:		
Allowable stress [N/mm²]:	168.00	168.00
Modulus of elasticity [kN/mm²]:	200	196,606
Wall thickness tolerance [mm]:	0.00	acc. to SA-542
Notes:		

--  
Creep rupture strength for 100000 h [MPa]:

## Tensile strength and yield stress at ambient temperature:

Diam./.....	Tensile str....	.....	ReH.....	Rupture.....	Rupture.....
Thick.....	Rm min.....	Rm max.....	.....	elong.....	elong.....
<= mm.....	MPa.....	MPa.....	MPa.....	lngt. %.....	lat. %.....
.....	.....	.....	.....	.....	.....

K-values as function of the temperature

Diam./...	.....	.....	.....	.....	.....	.....	.....	.....
Thickn...	50°C.....	100°C.....	150°C.....	200°C.....	250°C.....	300°C.....	350°C.....	400°C.....
<= mm...	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....
.....	.....	168.....	168.....	168.....	168.....	165.....	159.....	153.....


K-values as function of the temperature

Diam./.....	.....	.....	.....	.....	.....	.....	.....	.....
Thickn....	450°C.....	500°C.....	550°C.....	600°C.....	650°C.....	700°C.....	800°C.....	.....
<= mm.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....	MPa.....
.....	145.....	137.....	.....	.....	.....	.....	.....	.....

## Modulus of elasticity in dependence of the temperature:

Static modulus of elasticity in [kN/mm²] at the temperature of

260.....	370.....	480.....	425.....	20.....	150.....
186.....	169.....	143.....	157.....	200.....	200.....



# ASME BPVC VIII-1 2017 E4.3.1-2-3-4-5 -PTB-4-2013

## Coefficient of linear expansion:

Thermal coefficient of expansion between 20°C and

Density (20 °C) kg/dm³	100°C	200°C	300°C	400°C	500°C	600°C	700°C	800°C	Heat cond.	Heat capac.
	10E-6/K	10E-6/K	10E-6/K	10E-6/K	10E-6/K	10E-6/K	10E-6/K	10E-6/K	W/Km	J/kgK
	12,1	12,7	13,3	13,8	14,4	14,8	15,1	15,4		

Section 6: Boden/E4.4.4 with B taken by LV

## Material specification:

Regulation: ASMET1A:2017Spec. No.: SA-387 Product: Plate  
Material code: K11789-SA-387-11-Class:1-Size: Short name: 1.25Cr-0.5Mo-Si

## Design conditions and dimensions:

Temperature [°C]: 343,3333 Pressure [bar]: 3,833509  
Thickness [mm]: 15,875 Outside diameter [mm]: 3690,62

## Material values for test and design conditions:

	Test condition	Operating condition
Nominal design strength [N/mm²]:	118.00	118.00
Safety factor:		
Allowable stress [N/mm²]:	118.00	118.00
Modulus of elasticity [kN/mm²]:	204,3	183,4

Wall thickness tolerance [mm]: 0.00 acc. to SA-387

Notes:

S4 Size Requirements

For Section I applications, stress values at temperatures of 625°C and above are permissible but, except for tubular products 75 mm O.D. or less enclosed within the boiler setting, use of these materials at these temperatures is not current practice.

T4 Time-Dependent Properties

Allowable stresses for temperatures of 480°C and above are values obtained from time-dependent properties.

--

Creep rupture strength for 100000 h [MPa]:

## Tensile strength and yield stress at ambient temperature:

Diam./Thick. <= mm	Tensile str. Rm min MPa	ReH MPa	Rupture elong. %	Rupture lat. %

K-values as function of the temperature

Diam./Thickn. <= mm	50°C	100°C	150°C	200°C	250°C	300°C	350°C	400°C

K-values as function of the temperature

Diam./Thickn. <= mm	450°C	500°C	550°C	600°C	650°C	700°C	800°C

## Modulus of elasticity in dependence of the temperature:

Static modulus of elasticity in [kN/mm²] at the temperature of

650	-75	-200	-125	25	100	150	200	250	300	350	400	450	500	550
-----	-----	------	------	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

